

| 1/2 NPS Connecting Nipple |           |              |
|---------------------------|-----------|--------------|
| Schedule                  | I.D. (in) | Brush Access |
| S80                       | .546      | Yes          |
| S160                      | .466      | Yes          |
| XXH                       | .252      | NO           |

## 1/2 NPS Vent and Drain Valves Specify **FULL PORT**

Reduced port valves are restricted by .375  $\phi$  orifice, too small for brush


Navco S20 (2000#)  $\phi$ .59  
Navco B3 (3000#)  $\phi$ .50



Balon 1/2 **F**-F03N-SE (3000#),  $\phi$ .50



Model 1/2 **R**-F03N-SE, Reduced Port  
**NOT** suitable

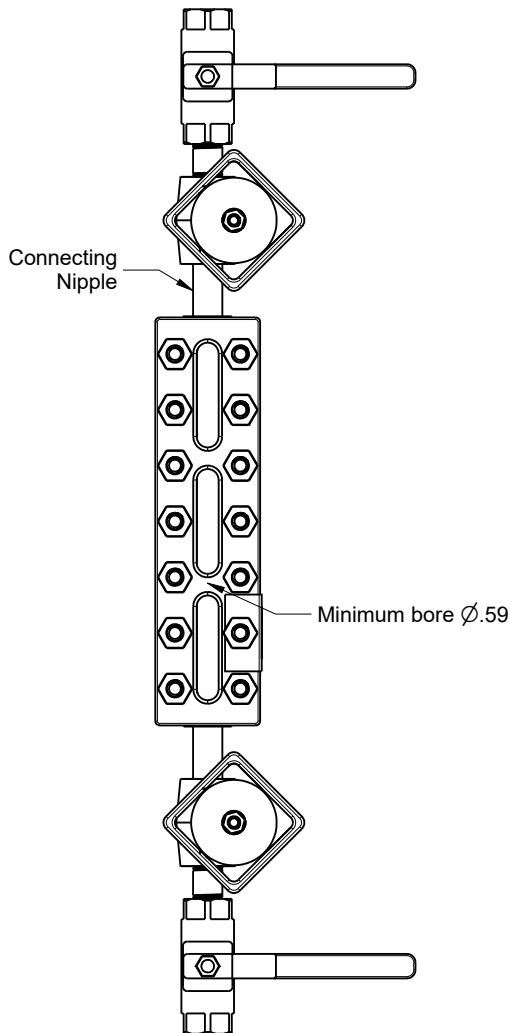

CL 800,  $\phi$ .55  
Full Port Only



Model LM-0536,  
**NOT** Suitable,  
(Not available in Full Port)



**Inferno Manufacturing Corporation**  
115 Ricou St. Shreveport, LA USA 71107  
T (318) 221-8454 F (318) 222-4106  
inferno@infernomfg.com

### Brush Access Requirements

|                         |                         |
|-------------------------|-------------------------|
| Drawing No: A212202     | Aprvd Date: 7/26/2021   |
| Drawing Date: 7/26/2021 | Revision: A             |
| Drawn by: TB            | Rev Date: 7/29/2021     |
| Approved by: AO         | © 2021 Inferno Mfg Corp |