

Model FT25-LE-MxM

Low Emission / Easy Manual Operation

Double Union - Offset Pattern - Safety Ball Check

For use with Close Hook-up "CH" style gages



Now available with Fugitive Emission API 622 Valve Stem Packing: Flexible Graphite with NiCr Wire

Certified Performance Class:

ISO FE AM-C01-SSA 0 - T200C-3000 psig - ISO 15848-1

Tested at 3000 PSI @ 392°F on methane gas, 2 heat-cool cycles,
no packing adjustment required, < 50 PPMv

Low Operating Torque: 5 Ft-lbs ...
operable by hand, no wrench required

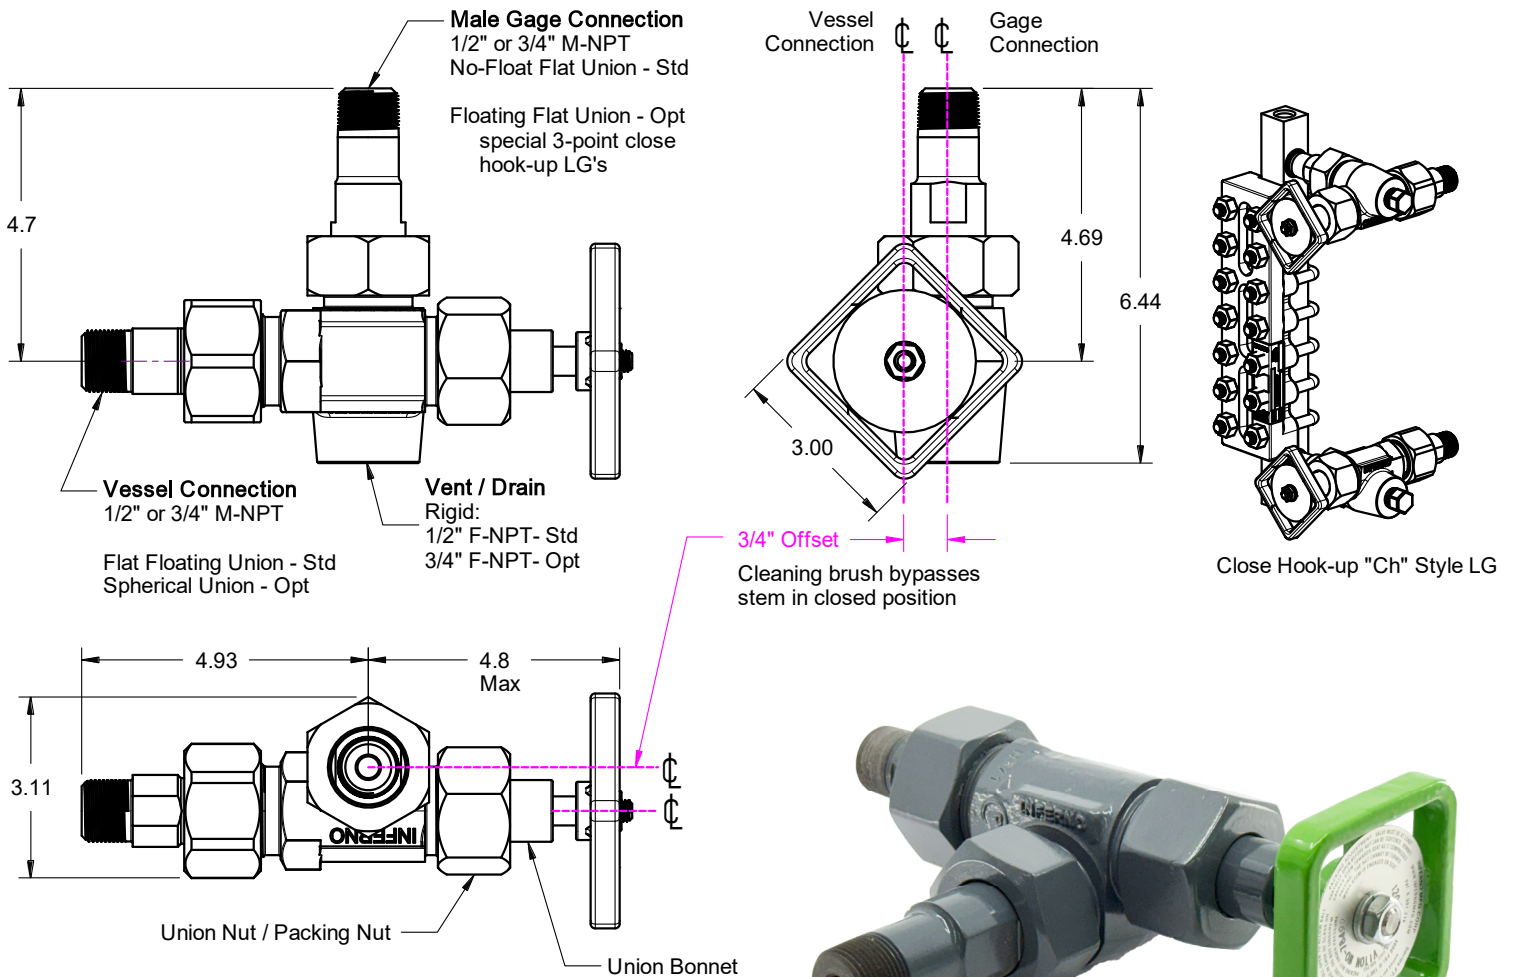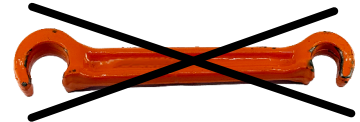


Certified Low-E to 3000 PSI @ 392°F
Pressure Integrity: 4000 PSI

A105N, A350 LF2, or F316 Construction

Weight per Set: 16.25 Lbs

Wetted per NACE MR-0175

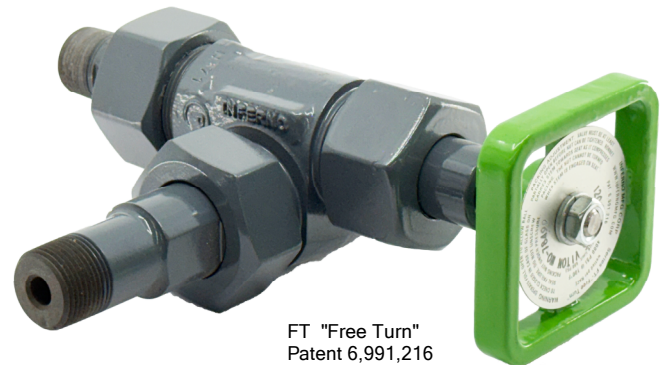

FT "Free Turn"
Patent 6,991,216

* Stem packing isolates valve workings from process
(salt water, H₂S etc) [FT "Free Turn" Advantages](#)

* Includes Viton o-ring face seals in union

* Floating union provides up to +/- 1/4" on vessel C-C

* Low emission SS certification tag included

* SKU and Work Order traceability on nameplate



Inferno Manufacturing LLC

115 Ricou St. Shreveport, LA USA 71107

(318) 221-8454

inferno@infernomfg.com

Drawing No: **Model FT25-LE-MxM**

Drawing Date: 7/28/2025

Revision: 0

Rev Date: N/A

© 2025 Inferno Mfg LLC

Sheet: 1/1